

Coordination of Aeronautical Frequencies

BY Isaiah Kofi Tefutor (CNS Technical Officer ICAO)

For the PRIDA Workshop

19-21 March in Abidjan, Côte d'Ivoire



Radio Regulations

Mandatory clauses used in

- Articles,
- Appendices and
- **ITU WRC Resolutions Obligatory** in Volume 3 of RR and referenced in Volume 1 and 2 of RR



Part of RR but no obligatory

ITU Standards

published in ITU-R or ITU –T specification documents

Except for the very few instances where an ITU-R Recommendation is incorporated in the Radio Regulations, included in Volume 4 of the Radio Regulations and compliance is mandatory.

ICAO Annex 10

Standards and Recommended Practices (SARPs) for Aeronautical **Telecommunications**

Article 38 of the ICAO Convention imposes an obligation to Contracting States, requiring them to notify the Organization of any differences between their national regulations and practices and the International Standards contained in the Annex





RELATIONSHIP BETWEEN ITU RADIO REGULATIONS AND OTHER MATERIAL AND ICAO SARPS

The Radio Regulations

- ensure interference-free operations of radiocommunication systems and provide ITU Member States with equitable access to the radio spectrum.
- supplement the ITU Constitution and Convention and form the core of the international framework for:
 - o management of the radio frequency spectrum,
 - o protection of existing radio services, and
 - o enabling the introduction of new and enhanced services

ICAO SARPs - Annex 10

- ensure the safety and regularity of air navigation.
- specify interface and performance standards for internationally agreed aeronautical systems.
- contain procedures for regular and emergency communications that are specifically developed for aviation purposes, taking account of the operational conditions.
- These procedures supplement the basic requirements of the Radio Regulations for procedures in aeronautical communications.





- The Radio Regulations and ICAO SARPs together, form a complementary set of regulatory provisions without any overlap.
- The Radio Regulations must evolve within the general telecommunications environment with its many and diverse users of the radio frequency spectrum, while the ICAO SARPs respond to the operational safety aspects of air navigation and are developed and agreed by aviation within the ICAO organizational framework.

FREQUENCY COORDINATION AND REGISTRATION

ITU framework

frequency assignments	 Is performed in accordance with procedures in the RR Provide international protection of the assignment Take place through the radio regulator authorities in each country
Frequency registration	in the Master International Frequency Register (MIFR)

ICAO framework

The coordination of frequency assignments ICAO Doc 9718 Vol II	 Is undertaken by ICAO through ICAO regional offices To support this coordination, ICAO has developed - frequency assignment planning criteria - A global frequency assignment plan Take place in most cases with the national civil aviation and/or radio regulatory authorities
Frequency registration	Many of aeronautical frequency assignment tend to be recorded only in national registers or in the ICAO regional air navigation plans.



HICA ICA

FREQUENCY COORDINATION AND REGISTRATION (continued) Reference material from an aeronautical perspective

	Allocations	Allotment	Assignment
Distribution to	Services	Areas or States	Stations
Reference documents/ tools relevant	documents/ National regulations	National regulationsRegional agreements	National regulations
to aviation community		 Regional frequency allotment tables in ICAO Doc 9718 Volume II Regional Air Navigation Plans 	 Frequency Finder frequency assignment coordination software used by ICAO Regional Offices for coordination of COM and NAV frequencies

ICAO Doc 9718

Handbook on Radio Frequency Spectrum Requirements for Civil Aviation

Vol. I - ICAO Spectrum Strategy and Policies Vol. II - Frequency Assignment Planning

Doc 9718 and other relevant material can be downloaded, free of charge, from the FSMP website (Documents section) at:

http://www.icao.int/safety/fsmp

- The latest Edition of Doc 9718 Volume I, second edition + recent updates,
 - is now available on FSMP website...
- Volume II has also recently been updated, second edition 2022



Spectrum Strategy and Policies

Overall ICAO Spectrum Policy (approved by Council)

- ICAO Spectrum Strategy
 - Long term spectrum use of current and future radio systems
- ICAO Spectrum Policy Statements
 - Specific actions to assist in meeting the Strategic Objectives
- ICAO Position for future WRC's
 - Medium and long term availability of spectrum for aviation



Frequency assignment planning criteria for aeronautical radio communication and navigation systems

Published for the first time in 2013, and Updated in 2017 and 2022


Provides globally harmonized frequency assignment planning criteria and guidance material to support the application of SARPs in Annex 10, Vol. V

- Developed in conjunction with the revisions to Annex 10, Vol. V
- Developed by FSMP (previously ACP Working Group F) and NSP
- Implementation through Regional Air Navigation Agreement by PIRG
- Frequency Assignment Planning criteria is used by the ICAO Frequency Assignment Planning software: Frequency Finder (FF)



Frequency assignment planning criteria for aeronautical radio communication and navigation systems

Frequency assignment planning criteria		Aeronautical Service
Chapter 1.	General methodology for compatibility analysis	
Chapter 2.	Aeronautical VHF air-ground radio communication systems operating in the band 117.975–137 MHz	Communications
Chapter 3.	Instrument landing system (ILS)	
Chapter 4.	VHF omnidirectional range (VOR)	
Chapter 5.	Distance measuring equipment (DME)	Navigation
Chapter 6.	Ground-based augmentation system (GBAS)	

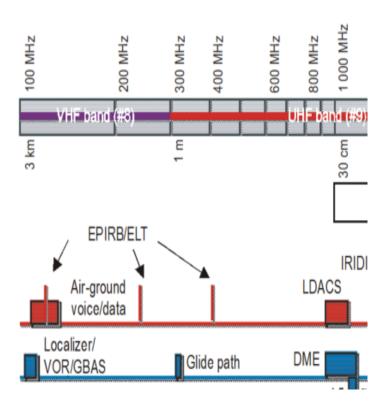




Doc 9718 Volume II Frequency assignment planning

Chapter 1 (1) General methodology

General methodology for compatibility analysis

- General model for compatibility assessment
- Based on:
 - Protection of desired signal at receiver input
 - Not to exceed maximum permissible distortion of receiver output signal e.i.r.p antenna receiver

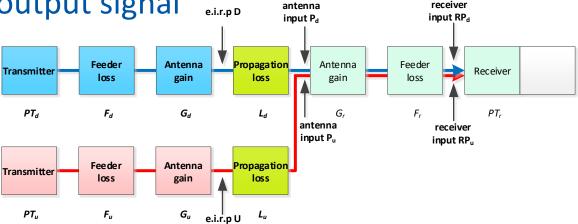



Chapter 2 (1)

Frequency assignment planning criteria for VHF air-ground communication systems

☐ General flow of Aircraft Operations

Pre departure Arrival Post arrival Departure En route Approach Approach Aerodrome Control Service Area Control Aerodrome Control Service Control Control **Service Service Service** ACC AS **TWR APP APP TWR** AS Ground/ **Approach** Ground/ **Approach** Aerodrome Aerodrome Aerodrome Aerodrome Control Control control tower control tower En-route surface (AS) Service Service / aerodrome surface / aerodrome (arrival) (departure) control control **Aerodrome A Aerodrome B**




Frequency assignment planning

Chapter 2 (2)

Frequency assignment planning criteria for VHF air-ground communication systems

Interference model (co-frequency separation)

- Conforms to the general methodology in Chapter 1
- Model for establishing separation distances to prevent airto-air interference:




Minimum separation between stations A and B:

Range A + Radio horizon A + Radio Horizon B +Range B



Chapter 3 (1) - Instrument Landing System (ILS)

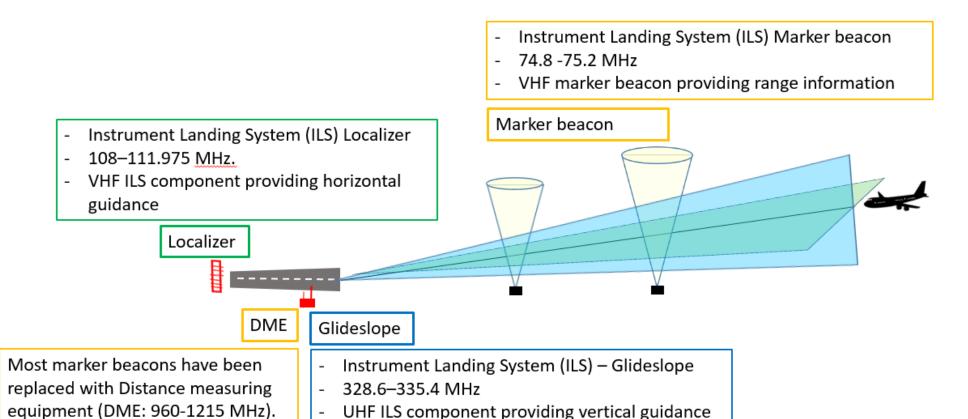



As long as marker beacons are in operation, the band needs to be

available."

328.600-335.400 MHz


Doc 9718 Volume II


Frequency assignment planning

Chapter 3(2) - Instrument Landing System (ILS)

Methodology and examples for calculation of separation distances for:

- Localisers (108-112 MHz)
- Glidepath (328.6-335.4 MHz)
- Localisers versus VOR and GBAS VDB

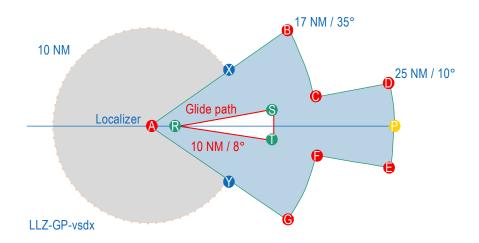

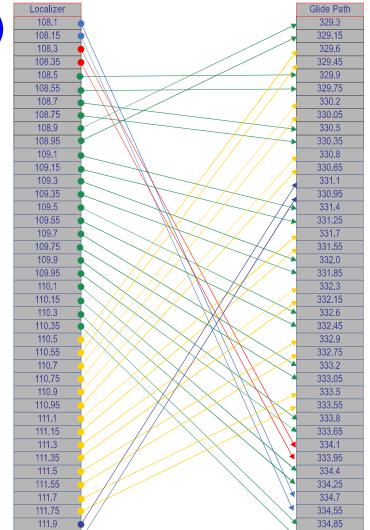


108.000-112.000 MHz


111.95



ICA0

Chapter 4 (1) - VHF Omnidirectional Range (VOR)/ Chapter 5 (2) - Distance measuring Equipment (DME)

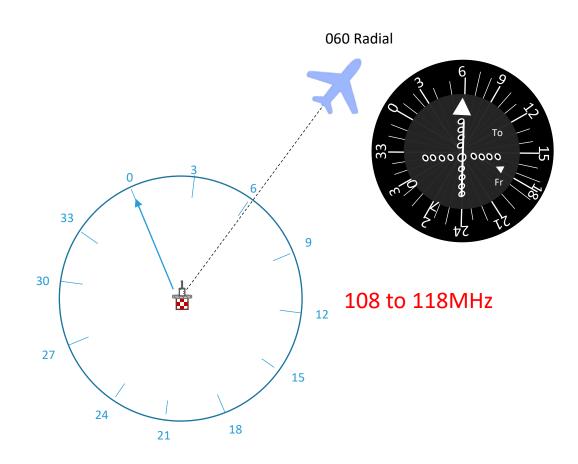

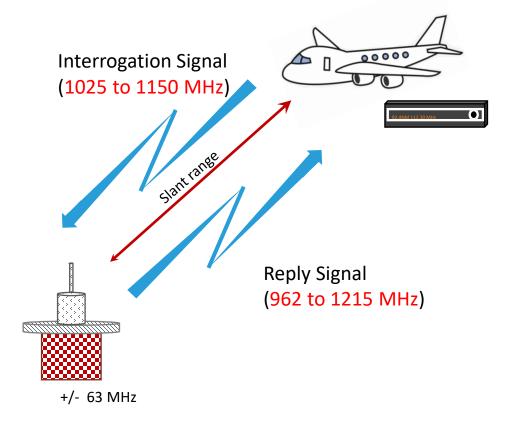


Doc 9718 Volume II Frequency assignment planning

Chapter 4 (2) – VHF Omnidirectional Range (VOR)

Methodology and examples for calculation of range and separation distances for:

60 000


- VOR (108-117.975 MHz)
 - ✓ Associated with DME
 - ✓ Operating in the band 108 112 MHz
- VOR versus Localizers
- VOR versus GBAS

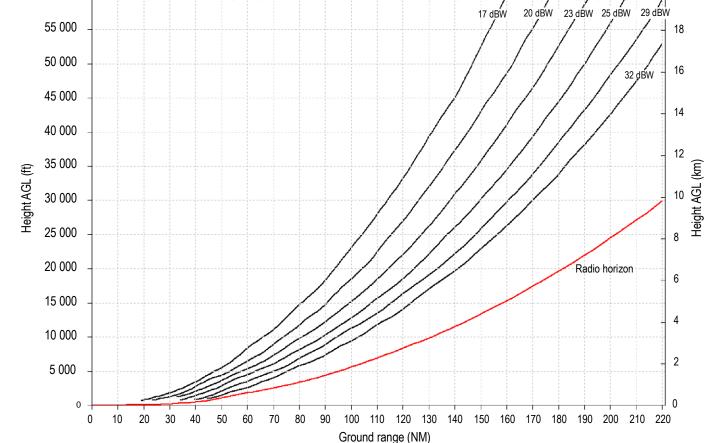

Ground range (km)





Doc 9718 Volume II Frequency assignment planning

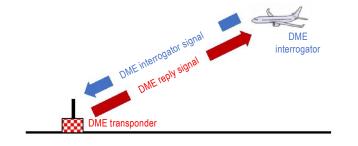

Chapter 5 (2)— Distance Measuring Equipment (DME), 960 – 1215 MHz


Methodology and examples for calculation of operational coverage and separation distances

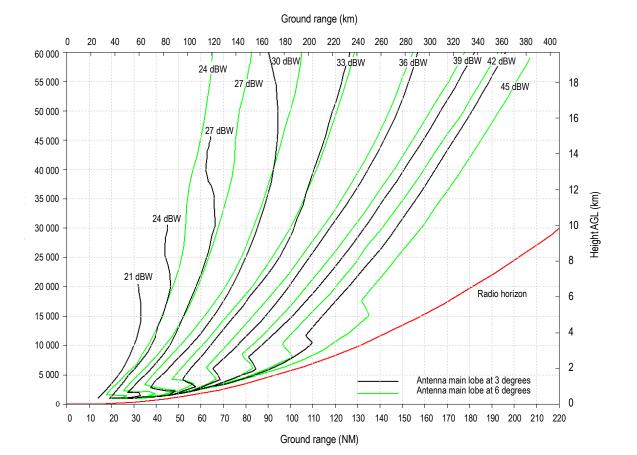

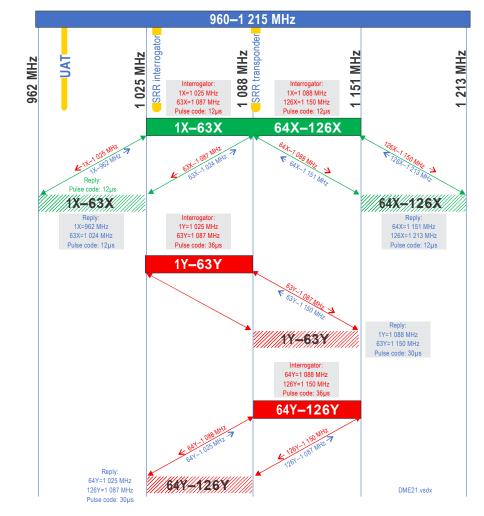



Chapter 6 (1) – Ground Based Augmentation System (GBAS), 108 – 117.975 MHz

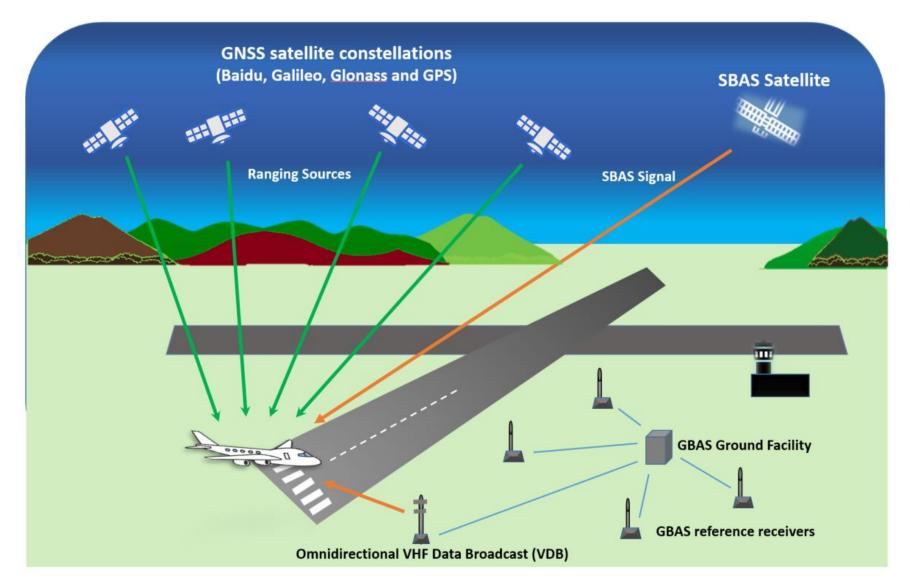





Frequency assignment planning

Chapter 6 (2) – Ground Based Augmentation System (GBAS),

108 - 117.975 MHz

Methodology and examples for calculation of operational coverage and separation distances

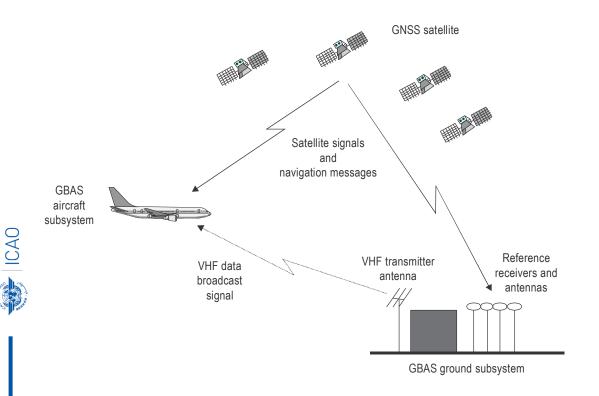

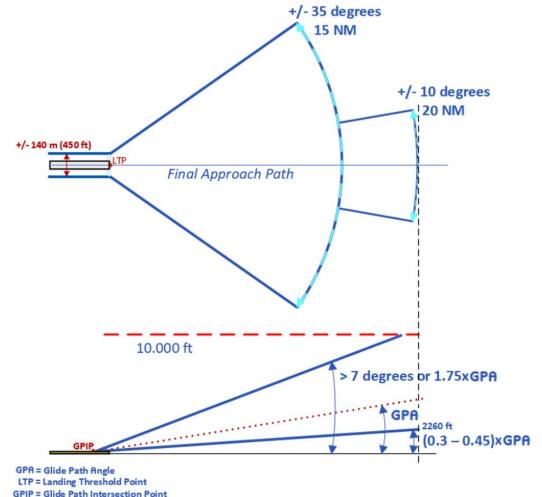

ICAO Coordination and Assignment procedures for VHF aeronautical mobile (route) services (AM(R)S) (117.975-137 MHz)

Aeronautical Service	Frequency	Systems	
Navigation	108–117.975 MHz	ILS localizer, VOR, GBAS	
Communications	117.975–137 MHz	Air-ground and air-air communications (VHF voice and data)	

- ICAO Regional Offices continue to maintain its frequency selection and coordination role (especially inter-regional coordination role), which includes the maintenance and promulgation of Frequency List No. 3 (Aeronautical Communication facilities in the VHF Frequency Bands from 117.975 to 137 MHz).
- The latest information is available for States (DGCAs, CAAs and ANSPs) on each Regional office's website or the website through Frequency Finder (frequency management tool developed and managed by ICAO)
- To facilitate the final coordination performed by the Regional Office, States/Administrations are encouraged to use the ICAO's Frequency Finder to select their proposed frequencies and perform compatibility checks before submitting their requests to the Regional Office.
- Upon receipt of the requests, the Regional Office will use the Frequency Finder to perform similar compatibility checks and frequency selection, if required. When a proposed/selected frequency may affect other air navigation regions, the Regional Office will coordinate with the respective Regional Offices or States of the affected regions.


Note.- Frequency Finder is the ICAO aeronautical radio frequency management tool for VHF COM and NAV frequency assignments.





ICA(

ICAO Coordination and Assignment procedures for VHF aeronautical mobile (route) services (AM(R)S) (117.975-137 MHz)

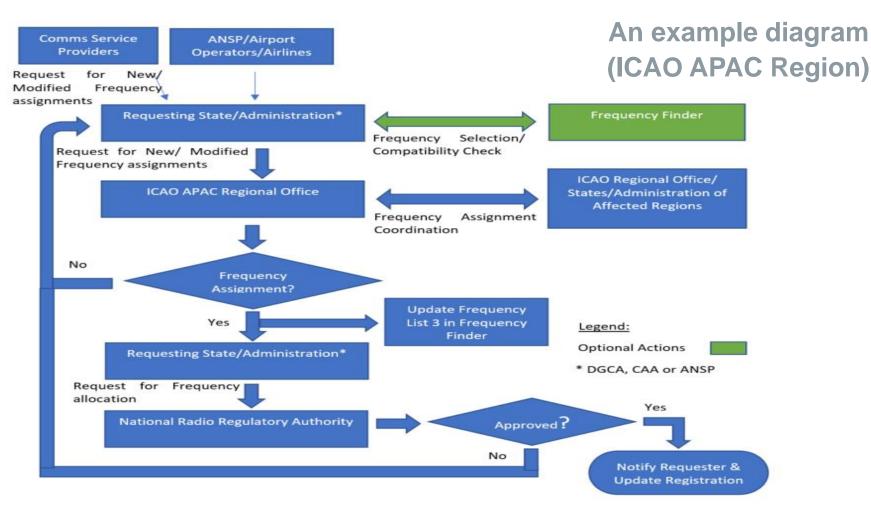

Frequency assignment planning

Future work

- The 2022 update added material on radionavigation systems (ILS, VOR, DME and GBAS), as developed with the help of NSP. Editorial update of this material is planned in the near future
- Future work will concentrate on refining the existing criteria and adding criteria for systems such as LDACS
- The Handbook and other relevant material can be downloaded from the FSMP website (Repository section) at http://www.icao.int/safety/fsmp





Thank You!

More information: Frequency Spectrum Management Panel (FSMP) https://www.icao.int/safety/FSMP